

Rec'd CT/PTO 19 JUL 2004 #3

INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)


The Patent Office  
Concept House  
Cardiff Road  
Newport NP10 8QQ  
WIPO PCT  
30 OCT 2003

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed 

Dated 14 October 2003

**BEST AVAILABLE COPY**

# Patents Form 1/77

Patents Act 1977  
(Rule 16)




02DEC02 E767483-3 D00192  
P01/7700 0.00-0227887.7

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference	N.87369 MN		
2. Patent application number (The Patent Office will fill in this part)	29 NOV 2001	0227887.7	
3. Full name, address and postcode of the or of each applicant (underline all surnames)	MIRADA SOLUTIONS LIMITED Oxford Centre for Innovation Mill Street Oxford OX2 0JX United Kingdom		
Patents ADP number (if you know it)	08429375002		
If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom		
4. Title of the invention	IMPROVEMENTS IN OR RELATING TO IMAGE REGISTRATION		
5. Name of your agent (if you have one)	J.A. KEMP & CO.		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	14 South Square Gray's Inn London WC1R 5JJ		
Patents ADP number (if you know it)	00000026001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	6
Claim(s)	3
Abstract	1
Drawing(s)	4 + 4

*gmc*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

*J.A. Kemp*  
J.A. KEMP & CO.

Date 29 November 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

NICHOLLS, Michael John  
020 7405 3292

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

-1-

IMPROVEMENTS IN OR RELATING TO IMAGE REGISTRATION

The present invention relates to the registration of images, that is to say the process in which two different images are compared to find how they match each other, and are then displayed superimposed one on the other.

The registration of different images (also often called fusion of images) is useful in a variety of fields. The images being compared and superimposed could be images of the same object acquired using different modalities, which thus show up different features of interest. The fact that different features of interest are shown by the two modalities is useful in itself, but the usefulness can be enhanced by displaying the two images in superimposition. Examples of this technique might be the fusion of an infrared image with a visible light image, for instance in a surveillance, mapping or medical situation, or, particularly in the medical field, the combination of two different modality images such as magnetic resonance images, nuclear medicine images, x-ray images, ultrasound images etc. In general this fusion of different images assists the interpretation of the images.

In some situations the two images to be fused are taken at same time, or nearly the same time, but in other situations it is useful to fuse images taken at different times. For example, in the medical field it may be useful to fuse an image taken during one patient examination with an image taken in a different examination, for instance six months or a year spaced from the first one. This can assist in showing the changes in the patient's condition during that time. The fusion of time-separated images arises also in many other fields, such as surveillance and mapping.

A typical registration (or fusion) technique relies on identifying corresponding points in the two images and calculating a transformation which maps the pixels of one image to the pixels of another. This may use, for example, the well known block matching techniques in which pixels in a block in one image frame are compared with pixels in corresponding blocks in a search window in the other image frame and the transformation is calculated which minimises a similarity measure in the intensities in the blocks, such as the sum of square difference. Other techniques

based on identification of corresponding shapes in the two images have also been proposed. Explanations of different registration techniques are found in, for example, US 5,672,877 (ADAC Laboratories), US 5,871,013 (Elscent Limited), and many other text books and published papers.

5        While such registration techniques are useful, the results can be regarded with suspicion by users. This is particularly true where the transformation which maps features in one image to features in the other involves not only a rigid movement, but also a non-rigid deformation of the image features. Users are typically prepared to accept the validity of a rigid movement, such as a translation and/or rotation, between  
10 two different images, but the validity of a shape deformation is much less clear. Figure 1 of the accompanying drawings illustrates schematically a typical situation. An image feature 1 in image frame (a) is found to match an image feature 1' in another image frame (b). To map the feature 1' to the original feature 1 it is necessary to perform a rigid displacement in the direction of arrow D in image (b), but it can be  
15 seen that there is also a shape change required because the right hand side of the object is stretched in image (b). Combining the rigid displacement and the deformation results in the fused image (c), but it can be seen that there is a resulting deformation field in the right hand part of the feature 1" in the fused image (c). Particularly in the medical field the concept of deformation like this is regarded with  
20 great scepticism by clinicians as they fear the consequences of an erroneous distortion: a stretched or shrunk functional image could lead the clinician to under- or over-estimate the extent of a diseased area, and lead to an inappropriate treatment with potentially dramatic consequences.

      The present invention provides an image registration, or fusion, method in  
25 which a confidence measure can also be displayed to the user to give the user an idea of the quality of registration. This confidence measure is calculated from the registration process. The measure of confidence can be, for example, the degree of transformation required to perform the mapping, and preferably be based on the degree of non-rigid deformation in the transformation. Thus the confidence measure  
30 may exclude rigid motions and represent only the magnitude of the local

deformation. The measure can also be based on the local change of volume implied by the mapping transformation from one image to the other.

Preferably the measure is selectively displayed in response to user input and it may be displayed as a visually distinguishable overlay on the display of the fused  
5 images. It may comprise a colour overlay with the colour or intensity (or both) indicating the measure of confidence, or the same could be achieved with a monochrome overlay whose grey level represents the measure. Alternatively, a symbol, such as a circle, can be displayed at any selected point in the fused image, whose size and/or shape, for instance the diameter of the circle, is measure of the  
10 confidence in the registration. Preferably, to avoid cluttering the display, the symbol is only displayed at a single point selected by the user, for example in response to the user "clicking" at the selected point on the screen.

The method is particularly applicable to fused medical images, though it is also applicable in other fields where images are registered, such as surveillance,  
15 mapping etc.

The invention may conveniently be embodied as a computer program comprising program code means for executing the method, and the invention extends to a storage or transmission medium encoding the program and to an image processing and display apparatus which performs the method.

20 The invention will be further described by way of example with reference to the accompanying drawings, in which:-

Figure 1 is a schematic diagram of an image registration or fusion process;

Figure 2 is a flow diagram of an embodiment of the invention;

Figure 3 illustrates an original MR image of the brain;

25 Figure 4 illustrates an original PET image of the brain;

Figure 5 illustrates the result of applying a non-rigid transformation to the PET image of Figure 4 so that it will register with the MR image of Figure 3;

Figure 6 illustrates the original MR image superimposed with the deformed PET image in registration with it;

30 Figure 7 illustrates the result of applying only a rigid transformation to the

PET image of Figure 4 so that it will register with the MR image of Figure 3;

Figure 8 illustrates a display of a fused image in accordance with one embodiment of the invention; and

Figure 9 illustrates a display of a fused image in accordance with another embodiment of the invention.

As indicated in Figure 2 a typical image fusion or registration process involves at step 21 the input of two images. These may be individual image frames in static imaging, or could be image sequences in a dynamic imaging application. The two images are compared in step 22 and the transformation which best maps features from one image onto corresponding features of the other is calculated. This transformation is, in essence, a mapping of pixels in one image to pixels in the other. Taking, as an example, a three dimensional image this may be expressed as :-

$$(x_1, y_1, z_1) = \text{RIG}(x_2, y_2, z_2) + \text{DEF}(x_2, y_2, z_2) \quad (1)$$

where F represents the mapping transformation. Typically this transformation may include a rigid movement and a deformation viz:-

$$(x_1, y_1, z_1) = \text{F}(x_2, y_2, z_2) \quad (2)$$

The rigid part of the movement may be a translation and a rotation, namely:-

$$(x_1, y_1, z_1) = \text{TRANS}(x_2, y_2, z_2) + \text{ROT}(x_2, y_2, z_2) + \text{DEF}(x_2, y_2, z_2) \quad (3)$$

Figures 3, 4, 5 and 6 illustrate an example of this method applied to brain imaging. Figures 3 and 4 illustrate respectively the original MR and PET images of the brain. Figure 5 illustrates the result of applying a non-rigid transformation to the PET image of Figure 4 so that it will register with the MR image of Figure 3 and Figure 6 illustrates the original MR image superimposed with the deformed PET image in registration with it. The advantages of being able to see at a glance the

information from both imaging modalities are clear. By way of a comparison, Figure 7 illustrates the result of superimposing a version of the PET image of Figure 4 onto the MR image of Figure 3 with only a rigid deformation.

In accordance with this embodiment of the invention the size of the deformable part of the transformation **DEF** is regarded as a measure of the disagreement between the rigid registration (**RIG**) and the deformable registration (**RIG+DEF**). Thus a confidence measure  $M$  is calculated from the deformable part of the transformation. As one example the confidence measure  $M$  may be simply the magnitude (norm) of the local displacement. That is to say:-

10

$$M = |\mathbf{DEF}(x_2, y_2, z_2)| \quad (4)$$

Alternatively, the confidence measure may be calculated as the determinant of the local Jacobian of the transformation, which defines the local stretching (change of volume) at a particular location. So if:-

15

$$\begin{aligned} x_1 &= F_x(x_2, y_2, z_2) \\ y_1 &= F_y(x_2, y_2, z_2) \\ z_1 &= F_z(x_2, y_2, z_2) \end{aligned} \quad (5)$$

Then the measure  $M$  becomes:-

$$M = \begin{vmatrix} \frac{dF_x}{dx} & \frac{dF_x}{dy} & \frac{dF_x}{dz} \\ \frac{dF_y}{dx} & \frac{dF_y}{dy} & \frac{dF_y}{dz} \\ \frac{dF_z}{dx} & \frac{dF_z}{dy} & \frac{dF_z}{dz} \end{vmatrix} \quad (6)$$

It is also possible to base the measure on the value of the similarity function



such as cross-correlation, mutual information, correlation ratio or the like (see for example A. Roche, X. Pennec, G. Malandain, and N. Ayache. Rigid Registration of 3D Ultrasound with MR Images: a New Approach Combining Intensity and Gradient Information. IEEE Transactions on Medical Imaging, 20(10):1038--1049,

5 October 2001) used in matching local blocks in the images, or to combine these various measure together to form a normalised estimate of the "confidence" in the registration process.

Once the measure has been calculated it can be displayed over the fused image. One way of displaying it is, in response to the user "clicking" at a certain  
10 point on the display, to display a circle whose diameter represents the value of the confidence measure. Figure 8 illustrates this applied to the fused image of Figure 6. The user can "point" to different positions on the image using the perpendicularly-intersecting cross-hairs (typically controlled by a pointing device such as a computer mouse), and "clicking" at the selected position causes a circle to be displayed as  
15 shown. The larger the circle the more non-rigid deformation has occurred and so the less agreement there is between the rigid and non-rigid registration. Thus the more careful the clinician should be while reviewing this fusion result. On the other hand, in areas where the circle has a small diameter, the registration has been basically a rigid movement, and thus the result of the fusion can be regarded as more reliable.

20 Figure 9 shows an alternative way of displaying the confidence measure on the fused image of Figure 6. In Figure 9 the overlay is a transparent colour wash (though shown in black and white in Figure 9) whose colour and intensity are directly related to the value of the confidence measure. For example, green of low intensity may be used where the confidence is high (i.e. the amount of non-rigid deformation is low)  
25 whereas red, growing more intense, can be used as the amount of non-rigid deformation increases. It can be seen that the confidence decreases towards the left of the image where a high non-rigid deformation was required to register the two images.

CLAIMS

1. A method of displaying two images in registration with each other comprising the  
5 steps of comparing the two images to each other, calculating a transformation which  
maps features in one image to corresponding features in the other, displaying the two  
images in superimposition based on the transformation, and displaying overlaid on the  
two images a measure of the confidence in the registration.
- 10 2. A method according to claim 1 wherein said measure of confidence is calculated  
from the degree of transformation required to perform said mapping.
3. A method according to claim 2 wherein said measure of confidence is calculated  
from the degree of non-rigid deformation in said calculated transformation.
- 15 4. A method according to claim 2 or 3 wherein said measure is calculated excluding  
rigid motions.
5. A method according to claim 2, 3 or 4 wherein said measure of confidence is  
20 calculated from the magnitude of the local deformation in said transformation.
6. A method according to claim 2, 3, 4 or 5 wherein said measure of confidence is  
calculated from the local change of volume implied by the transformation.
- 25 7. A method according to any one of the preceding claims wherein the measure is  
selectively displayed in response to user input.
8. A method according to any one of the preceding claims wherein the measure is  
displayed as a visually distinguishable overlay on the two images, the visual  
30 properties of the overlay at any point being based on the said measure.

9. A method according to claim 8 wherein the colour of the visually distinguishable overlay is varied in dependence on said measure.

10. A method according to claim 8 or 9 wherein the intensity of the visually distinguishable overlay is varied in dependence on said measure.

11. A method according to claim 8 wherein the grey-level of the visually distinguishable overlay is varied in dependence on said measure.

12. A method according to claim 8 wherein the visually distinguishable overlay comprises a symbol whose size and/or shape at a selected display point depends on said measure.

13. A method according to claim 12 wherein the symbol comprises a circle whose diameter at a selected display point depends on said measure.

14. A method according to claim 12 or 13 wherein the symbol is displayed at any time only at a single selected display point.

15. A method according to any one of the preceding claims wherein the images are medical images.

16. A computer program comprising program code means for executing on a programmed computer the method of any one of the preceding claims.

17. A computer-readable storage medium encoding a computer program in accordance with claim 16.

18. An image display apparatus comprising a display, and an image processor adapted to perform the method of any one of claims 1 to 15.

19. A method of displaying two images in registration with each other, the method being substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

5

10

15

20


25

30


ABSTRACT

IMPROVEMENTS IN OR RELATING TO IMAGE REGISTRATION

A method of displaying two images in registration with each other in which a  
5 visually distinguishable overlay is also displayed to represent the degree of  
"confidence" in the registration process. The degree of confidence may be calculated  
on the basis of the degree of non-rigid deformation needed to register the two images.  
The visually distinguishable overlay can be in the form of a transparent colour wash  
whose colour and/or intensity indicate the level of confidence, or a symbol, e.g. a  
10 circle, whose size represents the degree of confidence.

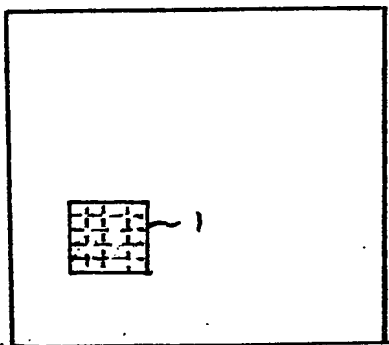


(a)

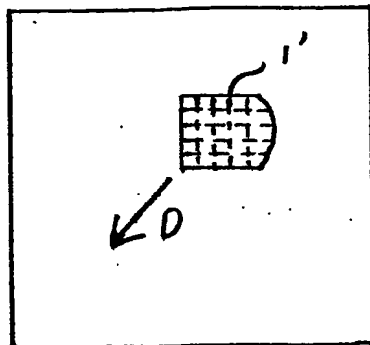

(b)

Fig. 1

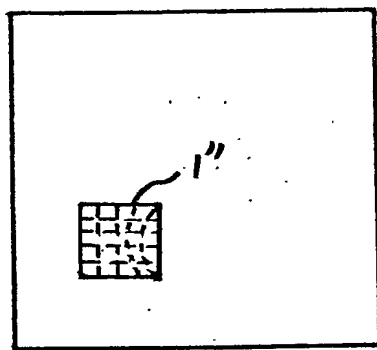

(c)


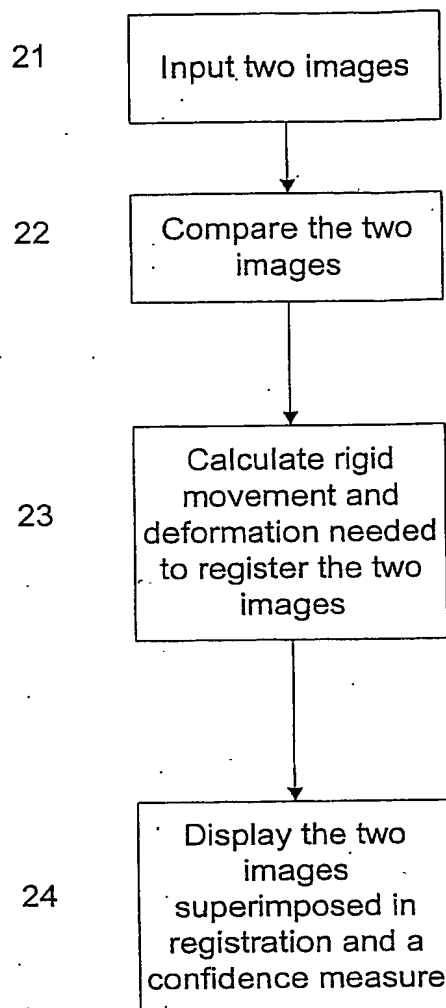



Figure 2




**Figure 3**

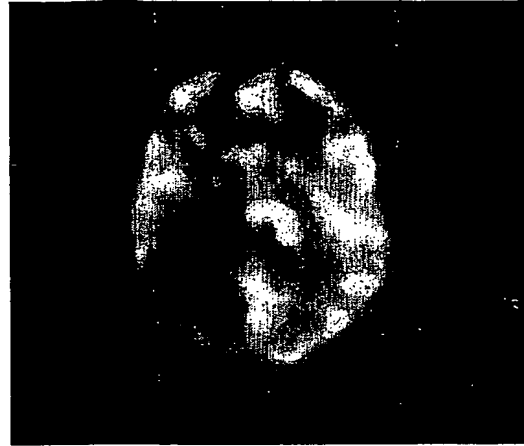

**Figure 4**

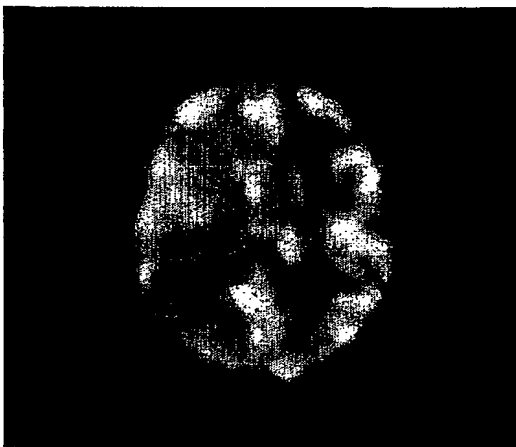

**Figure 5**

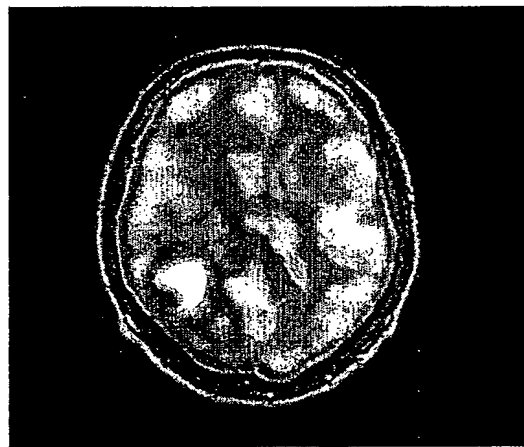


**Figure 6**



**Figure 7**



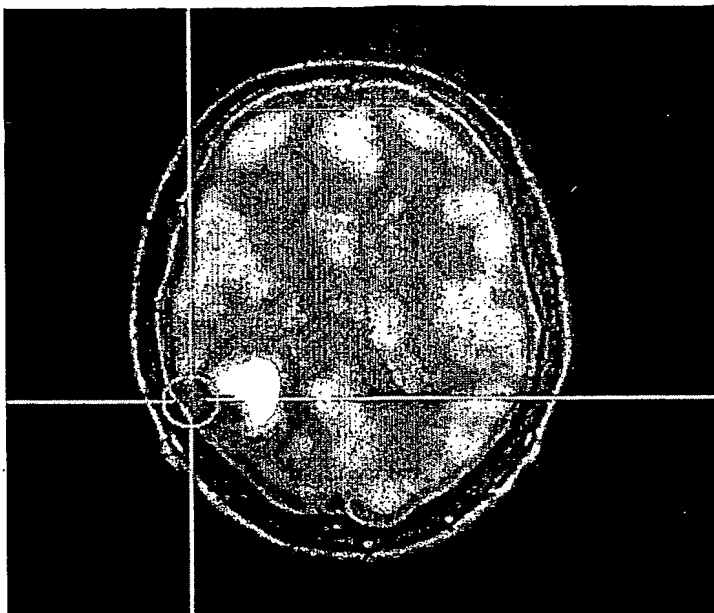

**Figure 8**



**Figure 9**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**